


EFG Archie

Archie is a family of chairs created from a passion for unique design and variation. The chairs are available in a number of versions to suit conference rooms, lounges and other spaces for work and meetings.





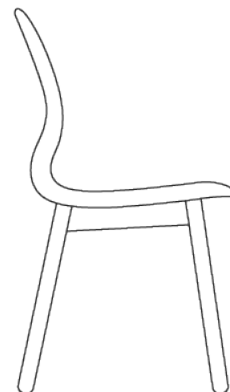

ENVIRONMENTAL CERTIFICATES

Wood from FSC® certified forests.



MATERIAL CONTENT

								
	Upholstered wooden chair ARCH401	Unupholstered wooden chair ARCH400	Upholstered 4-leg metal chair ARCA401	Unupholstered 4-leg metal chair ARCA400				
Wood	2,3	35,4 %	2,3 kg	40,7 %	-	-	-	-
Steel	0,1 kg	1,8 %	0,1 kg	2,1 %	2,3 kg	35,8 %	2,3 kg	41,0 %
Fabric	0,4 kg	5,6 %	-	-	0,4 kg	5,7 %	-	-
Foam	0,5 kg	7,5 %	-	-	0,5 kg	7,6 %	-	-
Plastic	3,3 kg	49,7 %	3,3 kg	57,2 %	3,3 kg	50,9 %	3,3 kg	59,0 %
Total	6,6 kg	100 %	5,7 kg	100 %	6,5 kg	100 %	5,6 kg	100 %
RENEWABLE CONTENT	40,9 %		40,7 %		5,7 %		0 %	
RECYCLED CONTENT	25,2 %	P1-P5, P7-P8 0,4 %	P6 Eco ¹ 29,0 %		32,6 %		P1-P5, P7-P8 8,2 %	P6 Eco ¹ 37,7 %
RECYCLABILITY²								
Material Recycling	51,5 %		59,3 %		86,7 %		100 %	
Energy Recovery	48,5 %		40,7 %		13,3 %		0 %	
Landfill	0 %		0 %		0 %		0 %	

Materials shall be recycled in accordance with the prescriptions in force locally.

¹Plastic shell P6 Eco contains 50 % post-consumer recycled content.

²Plastic shell in PC/ABS without fiberglass is 100 % recyclable.

CIRCULARITY

Designed with remanufacturing in mind.
Spare parts available.

INDICATOR C (C-MÅTTET)*

4,3 % P1-P5
31,7 % P6 Eco

CHEMICALS / MATERIALS

Plastic: Fulfill the chemical demands in Svanen – The Nordic Ecolabel.
Wood: Waterbased lacquers and additives.
Metal: Powder coating lacquers.
Fabric: Customers choice, fabrics certified with EU Ecolabel and Oeko-Tex available.
Contains no chemicals from Reach candidate list.

FULFILLED TECHNICAL STANDARDS

EN 16139; Strength, durability and safety, for personnel weight of 110 kg
EN 1728; Test methods for the determination of the strength and durability
EN 1022; Determination of stability
EN 12720; Assessment of surface resistance to cold liquids
SIS 839117; Assessment of surfaces resistance to scratches

COMPANY CERTIFICATIONS

ISO 9001
ISO 14001
FSC® Chain of Custody
Certificate code NC-COC-062914
License number FSC-C009111

CARE INSTRUCTIONS

Please visit our webpage, www.efg.info

** Calculations based on ARCB400. Indicator C is estimated as the ratio of an item that has "circulated", i.e. left a prior use phase and entered a new one. Per design the indicator does not include product life nor emissions during the use phase. Linder et al (2018). "Measuring product circularity as a means to promote resource productivity."*